




ELLIPTICAL PISTON VOLUMETRIC PUMP



The presented pump is used to transport semi-solid materials such as whole or destemmed grapes and fermented grape pomace, fruit pulp. The pump is equipped with a loading hopper with a screw conveyor.

The piston rotation speed is reduced to a minimum to ensure less stressful pumping/pressing of the raw material: 70 rpm.



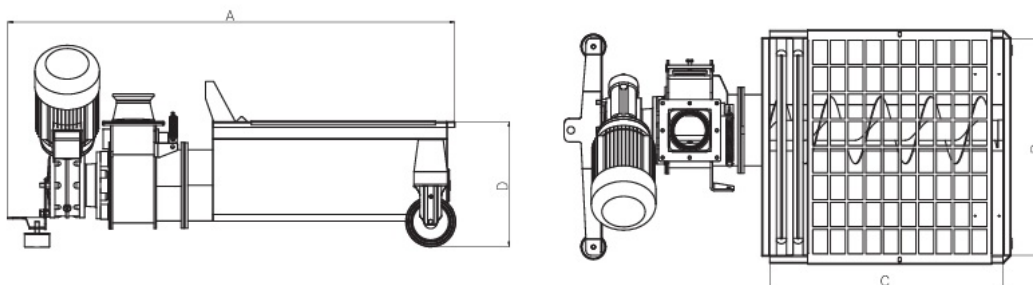

TIPO TYPE TYPE TYP TIPO	RACCORDI RACCORDS FITTINGS ANSCHLÜSSE RACORES Ø mm	MOTORE MOTEUR MOTOR MOTORLEISTUNG MOTOR kW - V	PORTATA DEBIT DELIVERY FÖRDERMENGE CAUDAL Ton/h	PREVALENZA DISCHARGE HEIGHT HAUTEUR DE VIDANGE ABLASSHÖHE PREVALENCIA mt	DIMENSIONI DIMENSIONS DIMENSIONS MASSE MEDIDAS A - B - C - D mm	PESO POIDS WEIGHT GEWICHT PESO Kg
V10	80	kW 1,5 - V 230/400	2 - 5	15 / 2 25 / 4	1080 - 500 - 500 - 325	80
V15	100	kW 3,0 - V 400 kW 4,0 - V 400	5 - 10	25 / 4 35 / 6	1340 - 650 - 700 - 375	130
V18	120	kW 4,0 - V 400 kW 5,5 - V 400	7 - 18	30 / 4 40 / 6	1420 - 650 - 700 - 375	150
V20	120	kW 5,5 - V 400	12 - 30	35 / 4 60 / 8	1600 - 700 - 700 - 500	300

