




PERISTALTIC PUMP AS



Pump for gentle transfer of whole or crushed grapes, fresh must, wine, fermented pomace. Self-priming pump, dry running, change of direction of work, automatic pressure sensor, inverter for smooth speed control. On request, the pump can be equipped with a tank, loading hopper with transport screw. The pump with loading hopper can operate in a system with a stem remover. Radio control.

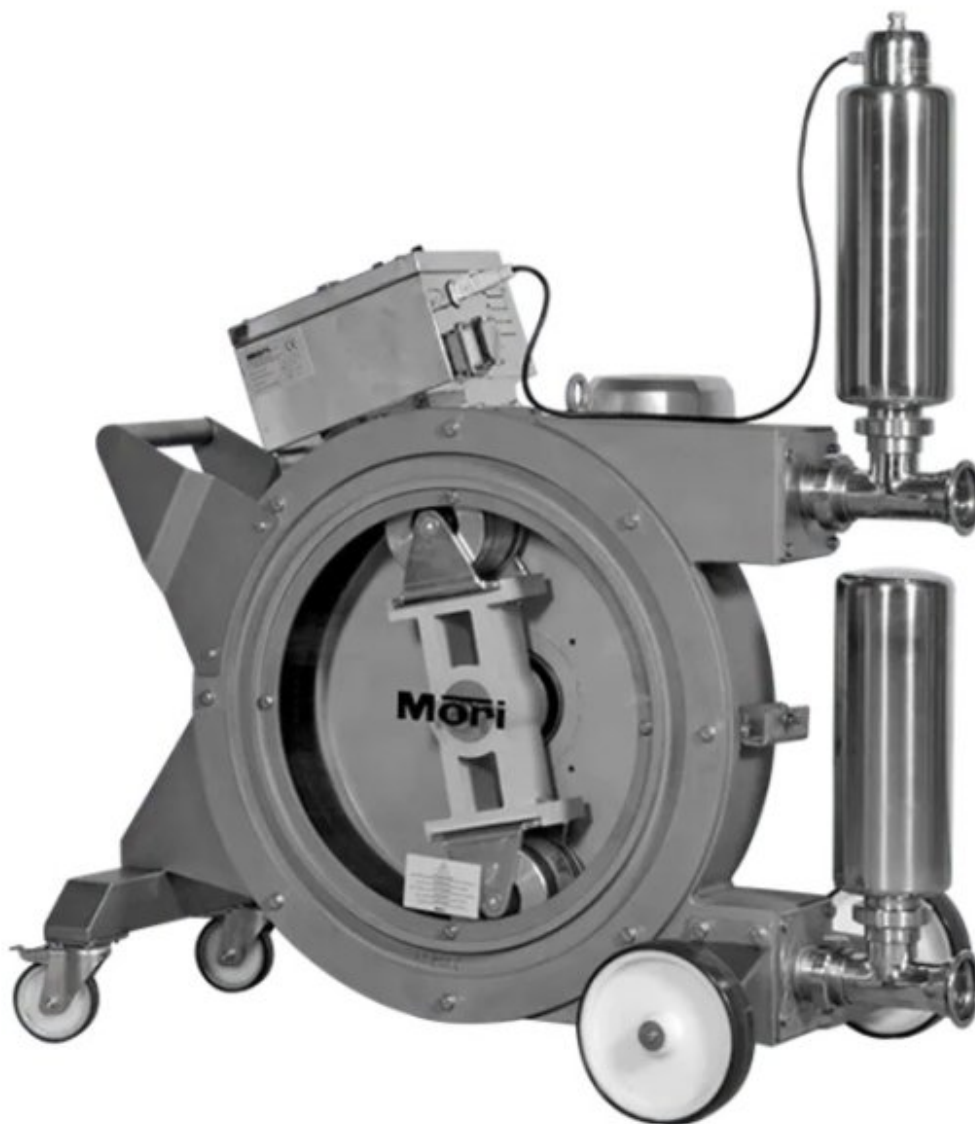



TIPO TYPE TYPE TYP TIPO	MOTORE MOTEUR MOTOR MOTORLEISTUNG MOTOR	PORTATA DEBIT DELIVERY FÖRDERMENGE CAUDAL	RACCORDI RACCORDS FITTINGS ANSCHLÜSSE RACORES	DIMENSIONI DIMENSIONS DIMENSIONS MASSE MEDIDAS						PESO POIDS WEIGHT GEWICHT PESO
				A	B	C	D	E	F	
AS 20	kW. 0,75 V. 400 - 50 Hz.	l/h 5 - 20	Ø 40	1000	800	450				Kg. 65
AS 50	kW. 1,5 V. 400 - 50 Hz.	l/h 5 - 65	Ø 40	930	1000	600				Kg. 140
AS 100	kW. 3,0 V. 400 - 50 Hz.	l/h 10 - 110	Ø 50	1050	1200	700				Kg. 230
AS 150	kW. 4,0 V. 400 - 50 Hz.	l/h 20 - 150	Ø 60	1050	1200	700				Kg. 250
AS 200	kW. 4,0 V. 400 - 50 Hz.	l/h 30 - 220	Ø 80	1400	1550	850				Kg. 410
AS 290	kW. 5,5 V. 400 - 50 Hz.	l/h 50 - 290	Ø 80	1400	1550	850				Kg. 460
AS 100 + TRA100	kW. 3 + 0,55 V. 400 - 50 Hz.	Ton/h 1 - 8	Ø 80	1850	1100	700	410	620	760	Kg. 270
AS 150 + TRA150	kW. 4 + 0,55 V. 400 - 50 Hz.	Ton/h 1 - 10	Ø 80	1850	1100	700	410	620	760	Kg. 290
AS 200 + TRA200	kW. 4 + 0,75 V. 400 - 50 Hz.	Ton/h 3 - 18	Ø 100	2300	1260	850	430	735	770	Kg. 460
AS 290 + TRA290	kW. 5,5 + 0,75 V. 400 - 50 Hz.	Ton/h 3 - 20	Ø 100	2300	1260	850	430	735	770	Kg. 510

