




PERISTALTIC PUMP KAPPA

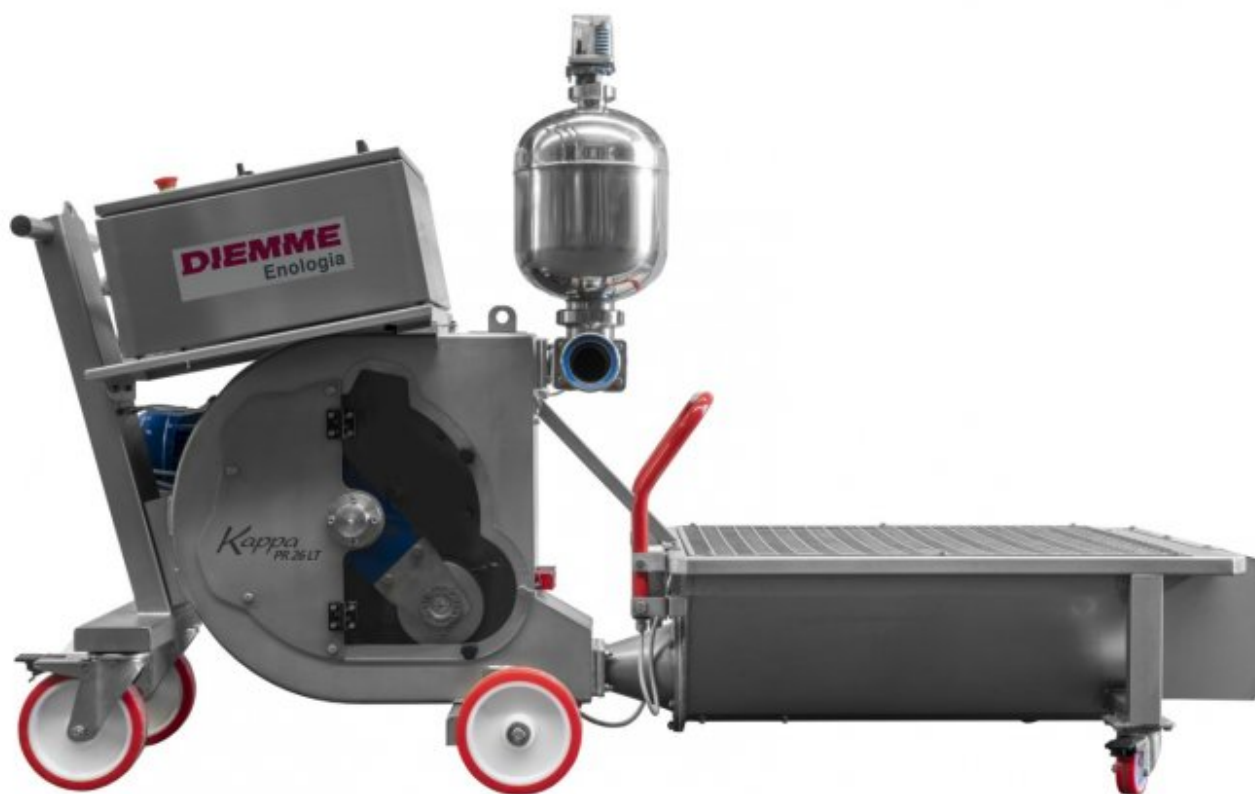

Kappa PR26 LT - PR39 LT

Stainless steel peristaltic pump for pumping destemmed- crushed grapes, fermented marc and liquids. Pump complete with expansion chambers for suction/pushing back and safety pressure switch. Control panel equipped with electronic variable frequency drive Inverter.

On demand:

- Reception tank equipped with moto-variator
- Radio control with functions: start/stop, forward-back, speed adjustment





I GB F D ES	Dimensioni Dimensions Dimensions Mäße Dimensiones									Potenza installata Installed power Puissance installée Anschlusswert Potencia instalada
—	A	A1	B	C	D	F	F1	G	DN	P [Kw] [50Hz]
PR26 LT	2067	1158	1245	860	650	650	590	500	DN65 DIN 11851	3,37
PR39 LT	2380	1469	1600	950	650	650	788	440	DN80 DIN 11851	5,5

I GB F D ES	Liquido/Acqua Liquid/Water Liquide/Eau Flüssigkeit/Wasser Líquido/Agua	Pigia-diraspato Destemmed-crushed grapes Raisins égrappés-foulés Entrappte und gequetschte Maische Uva despalillada y estrujada	Uva intera Whole bunch Raisins entiers Ganztrauben Racimos enteros	Vinaccia Pomace Marc Vergonere Maische Orujos
-	Lt/h	Kg/h	Kg/h	Kg/h
PR26 LT	2067	1158	1245	860
PR39 LT	2380	1469	1600	950

GALERIE

